

San Ace 250AD

ACDC Fan

9ADTV type

Features

High Airflow and High Static Pressure

These fans deliver a maximum airflow of 26.5 m³/min and a maximum static pressure of 650 Pa.

They are ideal for air conditioning systems such as heat exchangers and fan filter units (FFU), which require high cooling performance, and for cooling inverters and telecom equipment cabinets, which have high mounting density so air flows with difficulty.


No DC Power Supply Required

With an embedded AC-DC converter, these fans can be driven by an AC power supply.

This eliminates the need for a high-capacity DC power supply, reducing the overall costs.

Low Noise and High Energy Efficiency

The PWM control function enables the control of fan speed, contributing to lowering noise and improving energy efficiency of devices.

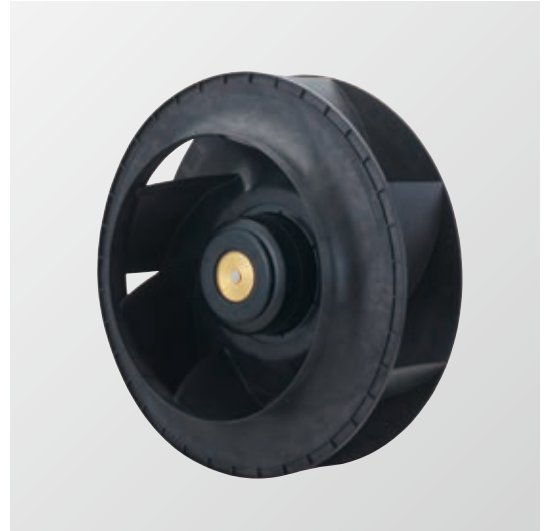

∅250 x 99 mm

Specifications When the optional inlet nozzle (109-1151) is mounted.

The models listed below **have pulse sensors with PWM control function.**


Model no.	Rated voltage [V]	Operating voltage range [V]	Frequency [Hz]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m ³ /min] [CFM]	Max. static pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating temperature [°C]	Expected life [h]
9ADTV11P0G001	115	90 to 132	50/60	100	2.3	140	2700	26.5 936	650 2.61	71	-25 to +60	40000/60°C (70000/40°C)
				20	0.3	10	1000	9.6 339	88 0.35	57		
9ADTV23P0G001	230	180 to 264		100	1.2	140	2700	26.5 936	650 2.61	71		
				20	0.2	10	1000	9.6 339	88 0.35	57		

* PWM input frequency is 1 kHz; models without specifications at 0% PWM duty cycle have zero fan speed at 0%.


Common Specifications

- Material Motor case: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life Refer to specifications
(L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection
- Dielectric strength 50/60 Hz, 1500 VAC, for 1 minute (between lead wire conductors and motor case)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and motor case)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Operating temperature Refer to specifications (Non-condensing)
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire AC power input L: Orange N: Gray Ground Yellow / Green
+10 VDC output Red ⊖ Black Sensor Yellow Control Brown
- Mass 1920 g

Airflow - Static Pressure Characteristics

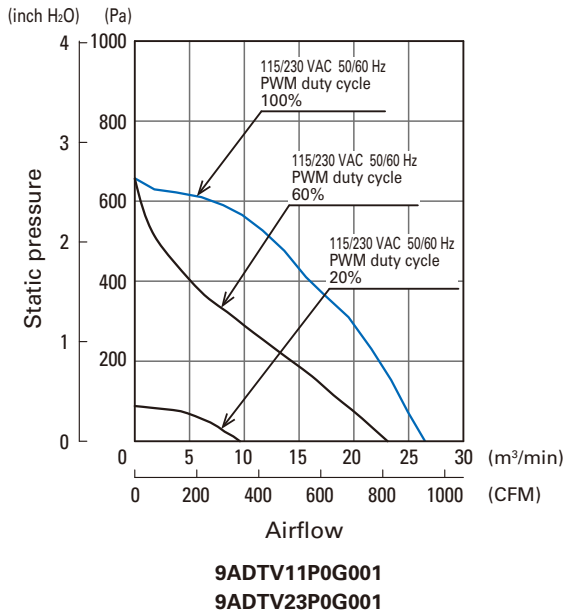


PWM Duty - Speed Characteristics Example

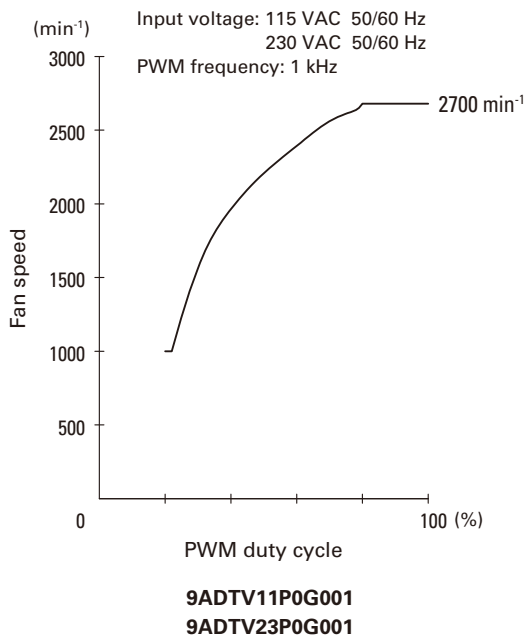

PWM Input Signal Example


Input signal waveform

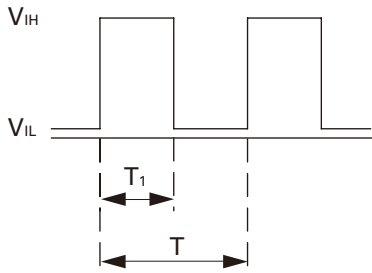

$V_{IH} = 2.8 \text{ to } 10.5 \text{ V}$ $V_{IL} = 0 \text{ to } 0.5 \text{ V}$
 PWM duty cycle (%) = $\frac{T_1}{T} \times 100$ PWM frequency 1 (kHz) = $\frac{1}{T}$
 Current source (I_{source}) = 5 mA max. (when control voltage is 0 V)
 Current sink (I_{sink}) = 0.1 mA max. (when control voltage is 10 V)
 Control terminal voltage = 11.5 V max. (when control terminal is open)

When the control terminal is open,
 fan speed is the same as when PWM duty cycle is 100%.
 Either TTL input, open collector or open drain can be used for
 PWM control input signal.

Example of Connection Schematic

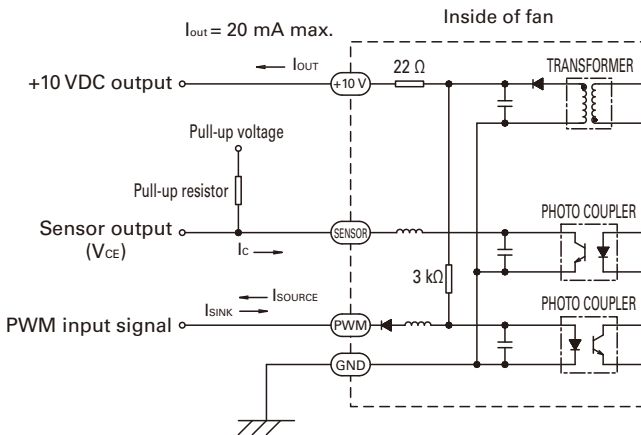


$V_{CE} = +27.6 \text{ V max.}$
 $I_C = 10 \text{ mA max. [} V_{OL} = V_{CE} \text{ (SAT)} = 1 \text{ V max.]}$
 Pull-up resistor = 5 kΩ max.

Specifications for Pulse Sensors

Output circuit: Open collector


Output waveform

In case of steady running

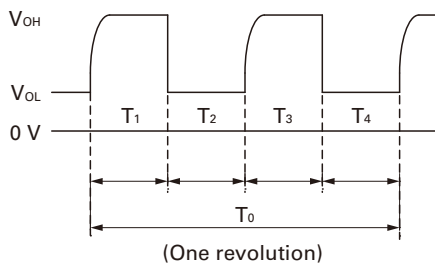


$T_{1 \text{ to } 4} \approx (1/4) T_0$
 $T_0 = 60/4N \text{ (s)}$
 $N = \text{Fan speed (min}^{-1}\text{)}$

Dimensions (unit: mm)

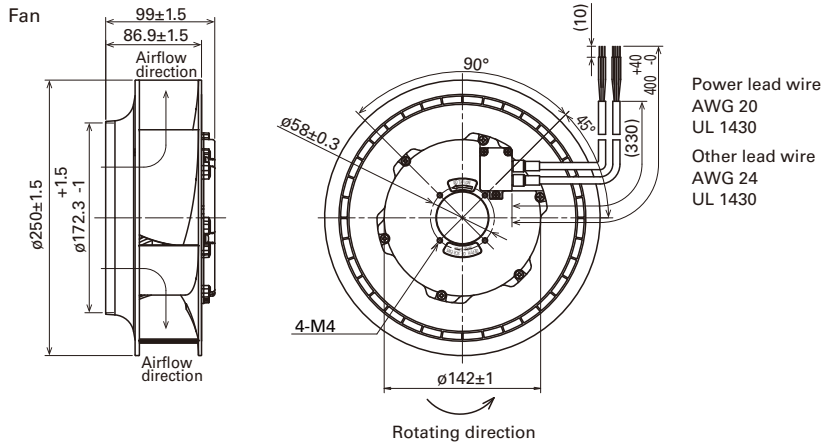


Finger guards
 Model no.: 109-1152
 Surface treatment: Nickel-chrome plating (silver) Mass: g
 Model no.: 109-1152H
 Surface treatment: Cation electropainting (black) Mass: g


Inlet nozzle
 Model no.: 109-1151
 Material: Steel sheet Surface treatment: Nickel-chrome plating (silver) Mass: 440 g
 Model no.: 109-1151H
 Material: Steel sheet Surface treatment: Cation electropainting (black) Mass: 440 g

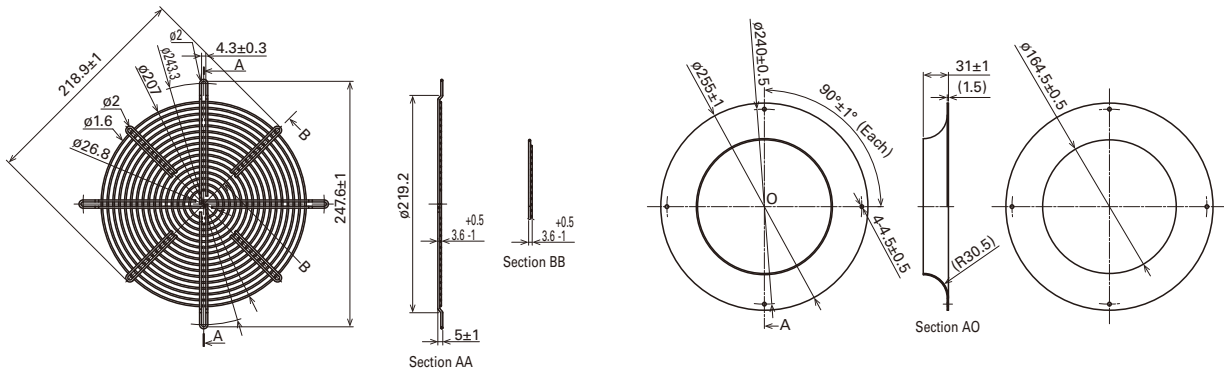

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

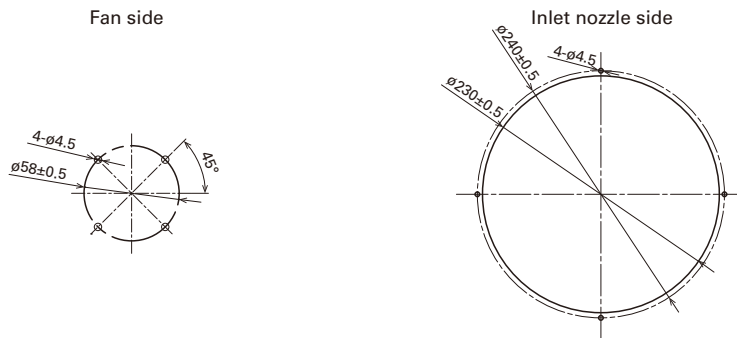

Reference Diagram for Mounting

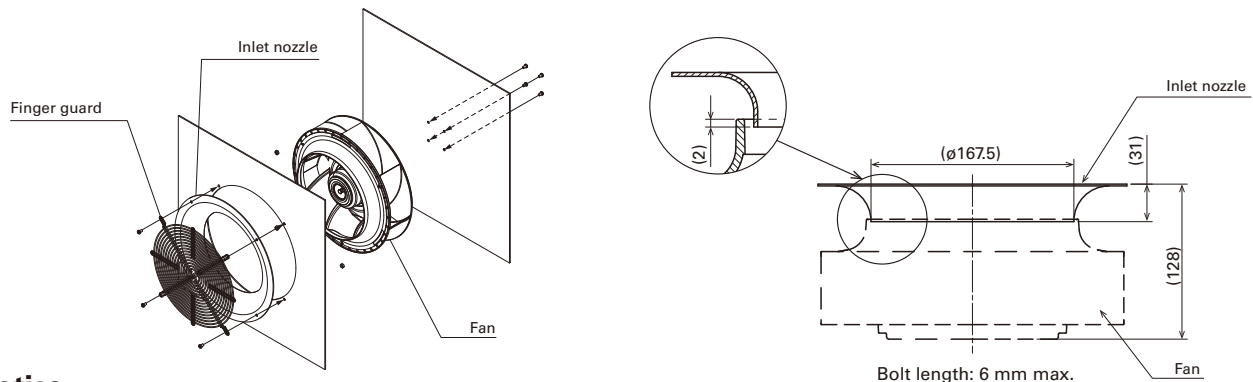

Notice

- Please read the "Safety Precautions" on our website before using the product.
- The products shown in this catalog are subject to Japanese Export Control Law. Diversion contrary to the law of exporting country is prohibited.
- For protecting fan bearings against electrolytic corrosion near strong electromagnetic noise sources, we provide effective countermeasures such as Electrolytic Corrosion Proof Fans and EMC guards. Contact us for details.

SANYO DENKI CO., LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020

<https://www.sanyodenki.com>

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

"San Ace" is a trademark of SANYO DENKI CO., LTD.

Specifications are subject to change without notice.

CATALOG No. C1115B001 '21.4